



Sirius Optics
Unit 1
26 Darnick Street
Underwood, Qld 4119

Opening Hours


10am-5:30pm Mon-Fri
9am-2pm Sat

Phone: 07 3423 2355
www.sirius-optics.com.au

SwarovskiCL Companion 10x30 Green + UJ Urban Jungle

AUD
\$1,950.00

Product Images

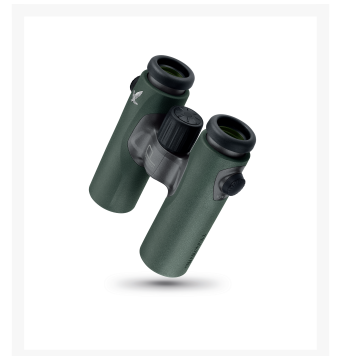

Short Description

THE FREEDOM TO EXPERIENCE MORE

You'll never miss out with the new CL Companion. These elegant binoculars with impressive optics fit perfectly in your hand. They are always with you to ensure you make the most of every sighting.

Description

CL Companion 10x30 B

See every crucial detail with the new CL Companion 10x30. Improved optics with 10x magnification bring you closer to nature. The ergonomic design of these compact, lightweight (500 g/17.6 oz) binoculars makes them an excellent companion providing you with unique experiences when you're on the move.

URBAN JUNGLE

Rediscover the city with all its hotspots, treasures, and unexpected natural gems. With the URBAN JUNGLE accessory package, you're ready for fascinating encounters that take you far from the everyday. Casual, sporty, and functional – for people who live life to the fullest.

Technical Data

Magnification	10
Effective objective lens diameter (mm)	30
Exit pupil diameter (mm)	3
Exit pupil distance (eye relief) (mm)	16
Field of view (ft/1000 yds / m/1000 m)	324 / 108
Field of view (degrees)	6.2
Field of view for eyeglass wearers (degrees)	6.2
Field of view, apparent (degrees)	58
Shortest focusing distance (ft / m)	9.8 / 3
Dioptric compensation (dpt)	± 4
Diopter correction at ∞ (dpt)	>5
Light transmission (%)	90
Pupil distance (in/mm)	2.2-2.9 / 55-74
Twilight factor acc. to ISO 14132-1	17.3
Length approx. (in/mm)*	5.0 / 127
Width approx. (in/mm)**	4.5 / 118
Height approx. (in/mm)**	2.2 / 55
Weight approx. (oz/g)	17.6 / 500
Functional temperature	-13 °F to +131 °F (-25 °C / +55 °C)
Storage temperature	-22 °F to +158 °F (-30 °C / +70 °C)
Submersion tightness	13 ft / 4 m water depth (inert gas filling)

* Value with eyecups twisted in

** Dimensions at a pupil distance of 2.5 in / 64 mm

Specifications